

PAREX USA STUCCO ASSEMBLIES

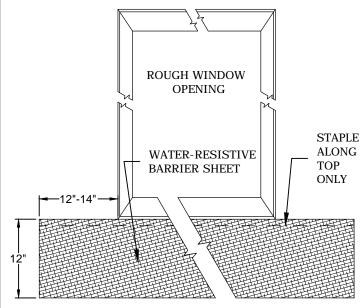

STEP 1:

WATER-RESISTIVE BARRIER SHEET UNDER SILL


CUT WATER-RESISTIVE BARRIER SHEET TO
APPROXIMATE SIZE SHOWN & STAPLE INTO PLACE AT
THE BOTTOM OF THE ROUGH OPENING.
WATER-RESISTIVE BARRIER SHEET SHOULD ONLY BE
STAPLED ALONG THE TOP EDGE.



STEP 3:

CUTTING PAREX USA FLASHING MEMBRANE
CUT A PIECE OF PAREX USA FLASHING MEMBRANE 8"
LONGER THAN THE ROUGH OPENING WIDTH. MAKE TWO
SMALL CUTS 2" LONG THROUGH THE MEMBRANE AS
SHOWN. MAKE 2 SMALL CUTS THROUGH THE MEMBRANE
AS SHOWN.


NOTE: 2"X 6" FRAMING REQUIRES 12" WIDE MEMBRANE CUTS SHOULD BE 6". AT LEAST 2" WIDER THAN THE SUBSTRATE WALL.



STEP 2: INSTALLING MEMBRANE "BANDAGES"

CUT "BANDAGES" TO APPROXIMATE SIZE INDICATED.

CUT PAREX USA PAREX USA FLASHING MEMBRANE DIAGONALLY AT SILL CORNERS AS SHOWN. SHEATHING OR WATER-RESISTIVE BARRIER SHEET SHOULD NOT BE VISIBLE AT THE CORNERS OF ROUGH OPENING.



STEP 4:

FOLDING PAREX USA FLASHING MEMBRANE FOLD PAREX USA FLASHING MEMBRANE TO CONFORM WITH ROUGH OPENING. PEEL PROTECTIVE BACKER TO EXPOSE ADHESIVE.

G1.12A ROUGH WINDOW OPENING 1 OF 4

PAREX ARMOURWALL 100 & 300, LAHABRA FASTWALL 100 & 300, ELREY FASTWALL & FIBER-47, TEIFS ONE COAT & SCRATCH & BROWN

□ HE □ KRAK-SHIELD □ WATERMASTER

NOTE

- 1. Stucco claddings and any cladding using a mortar bed require the use of a slipsheet installed over the Water-Resistive & Air Barrier Coating to prevent adhesion to the stucco.
- 2. Refer to Parex USA specifications specified basecoat products and thickness.

Disclaimer: The design specifications and construction shall comply with all local building codes and standards. Parex USA installation guidelines are for general information and guidance only and Parex USA specifically disclaims any liability for the use of this design, and for design engineering, or workmanship of any project. The assembly shall be designed to prevent condensation within the assembly. The designer and the user shall provide final drawings and specifications. Products shown other than those manufactured by Parex USA are shown for clarity of the Parex USA product only. Contact the Manufacturer for installation instructions.

Technical Support: 1-800-226-2424 wwww.parexusa.com